


FlowPark for parkour


F.LIGHT Diagonal L

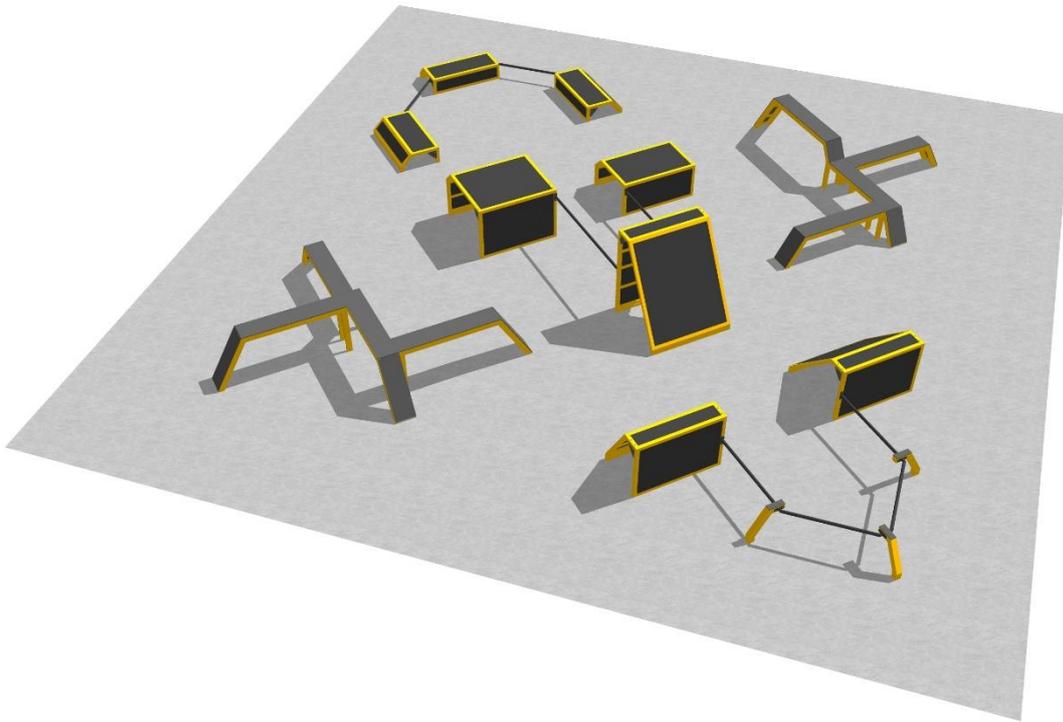


Description

Diagonal L is the flagship configuration, maximizing the potential of the **F.LIGHT** modular system. With a substantial footprint of 169 m², it features an intricate network of connected rails, walls, and vaults perfectly suited for high-intensity flow and group sessions. A full-scale parkour experience that requires no special safety flooring.

Top view

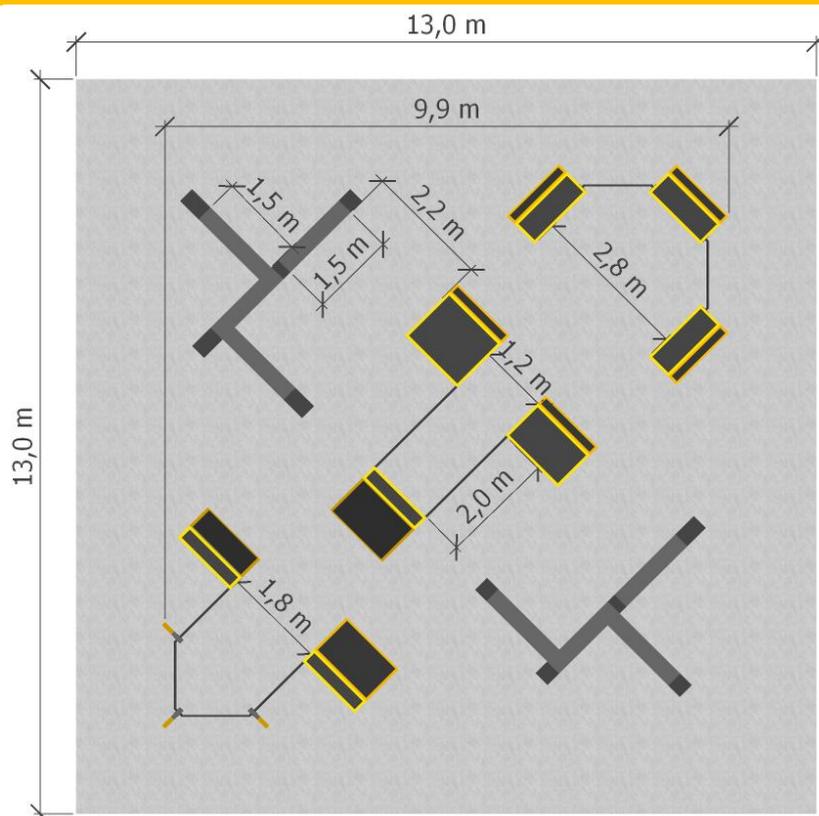

Side view

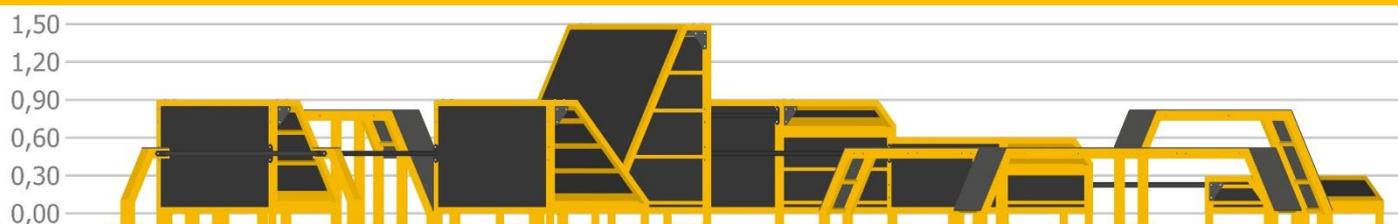

Elements		Technical data	
Rail Ø42,4 mm height <1,6 m	8	Standard:	EN 16899:2017-02
Pole	3	Equipment dimensions:	9,9 x 9,6 x 1,5 m
LW1-H3	1	Safety zone:	13,0 x 13,0 (169 m ²)
LW1-H2	1	HIC min [m]:	1,0
LW1-H1-L70	3	HIC max [m]:	1,0
LW2-H3	1	Equipment weight [kg]:	1300
LW2-H5	1	Number of users:	8
LW3-H3	1	Anti-corrosion coating:	Powder coating
LS3-H2	2	Colors:	RAL 1037 - yellow
LS3-H3	2		RAL 9011 – black (rails, bars)
LS4-H2	2	Fixing to foundation:	M12 x 145 – ring anchors
LS5-H3	2	Poles – material:	steel square section 80x80x3 mm
		Rails, bars - material:	steel pipe Ø42,4 wall >5 mm
		Walls - material:	HPL 10 mm anti-slip HEX layer
		Platforms – material:	HPL 10 mm anti-slip HEX layer
		Minimum age of user:	8 years
		Maximum weight of user:	120 kg