


## FlowPark for parkour


## F.LIGHT Diagonal M

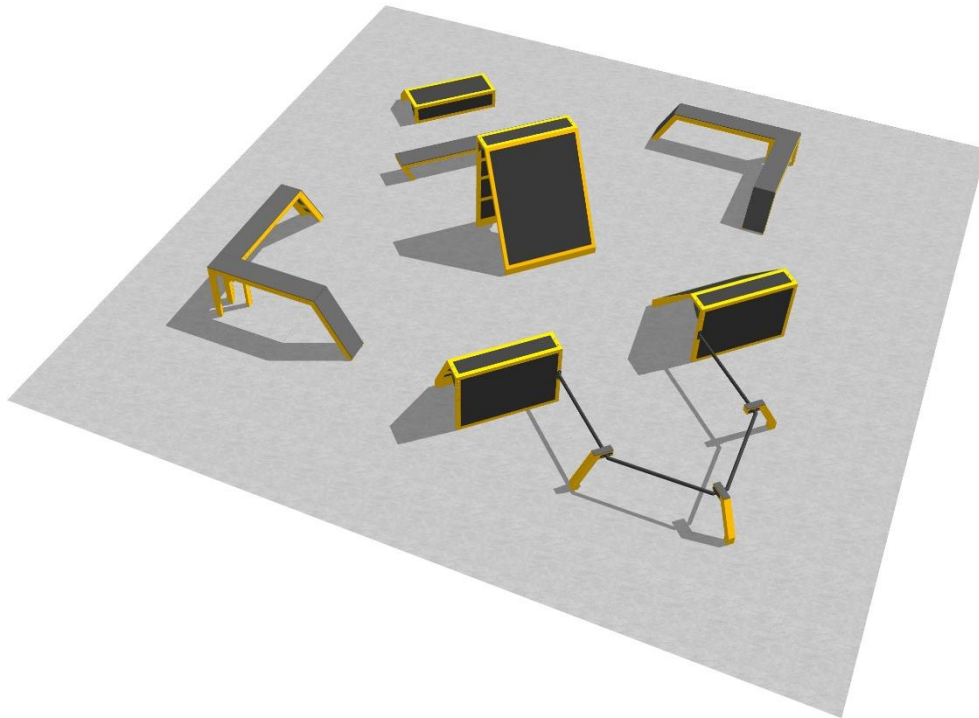

### Description

**Diagonal M** introduces dynamic flow lines and rail connections to the diagonal layout. Spanning an area of 100 m<sup>2</sup>, this balanced set bridges the gap between static drills and continuous movement, offering enough complexity for creative runs while maintaining a footprint that easily integrates into public squares or parking lots.

### Top view

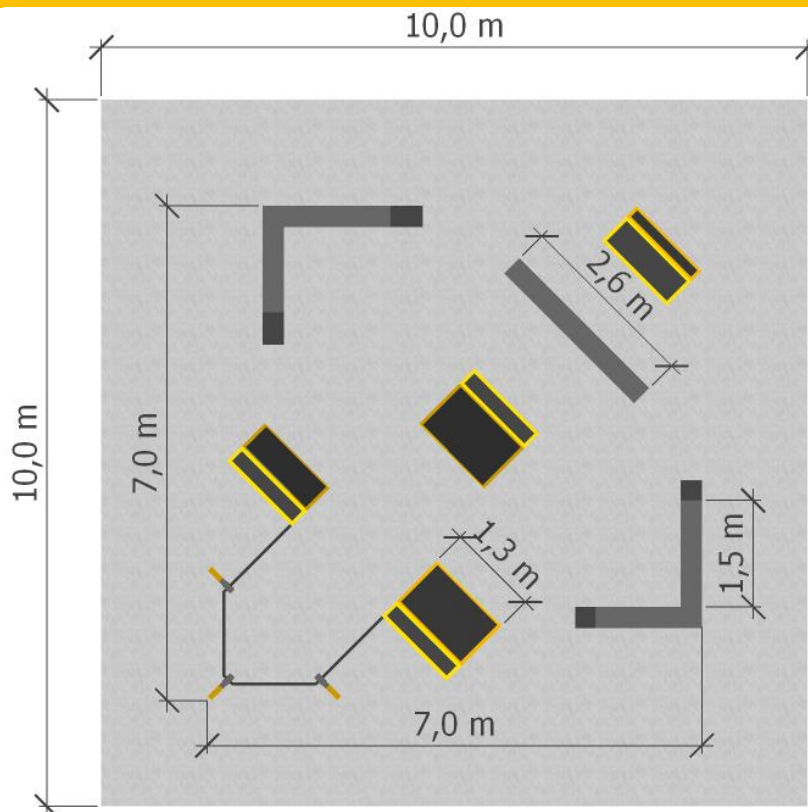

## Side view



Elements		Technical data	
Rail Ø42,4 mm height <1,6 m	3	Standard:	EN 16899:2017-02
Pole	3	Equipment dimensions:	7,0 x 7,0 x 1,5 m
LW1-H1-L70	1	Safety zone:	10,0 x 10,0 (100 m <sup>2</sup> )
LW2-H3	1	HIC min [m]:	1,0
LW2-H5	1	HIC max [m]:	1,0
LW3-H3	1	Equipment weight [kg]:	750
LS1-H1	1	Number of users:	6
LS3-H2	2	Anti-corrosion coating:	Powder coating
LS3-H3	2	Colors:	RAL 1037 - yellow RAL 9011 – black (rails, bars)
		Fixing to foundation:	M12 x 145 – ring anchors
		Poles – material:	steel square section 80x80x3 mm
		Rails, bars - material:	steel pipe Ø42,4 wall >5 mm
		Walls - material:	HPL 10 mm anti-slip HEX layer
		Platforms – material:	HPL 10 mm anti-slip HEX layer
		Minimum age of user:	8 years
		Maximum weight of user:	120 kg