


## FlowPark for parkour


## F.LIGHT Diagonal S

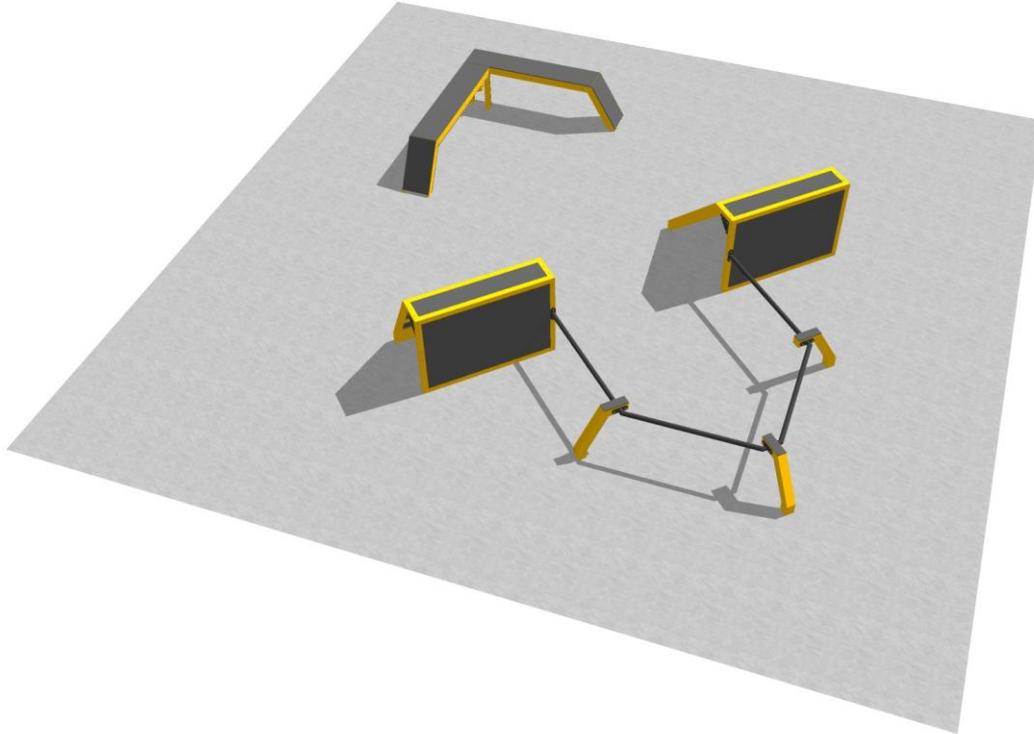


### Description

**Diagonal S** is a compact, entry-level configuration designed to turn any concrete patch into a functional training spot. Occupying just 64 m<sup>2</sup>, it focuses on fundamental vaulting and precision techniques, serving as an ideal "plug-and-play" solution for limited urban spaces where efficiency is key.

### Top view

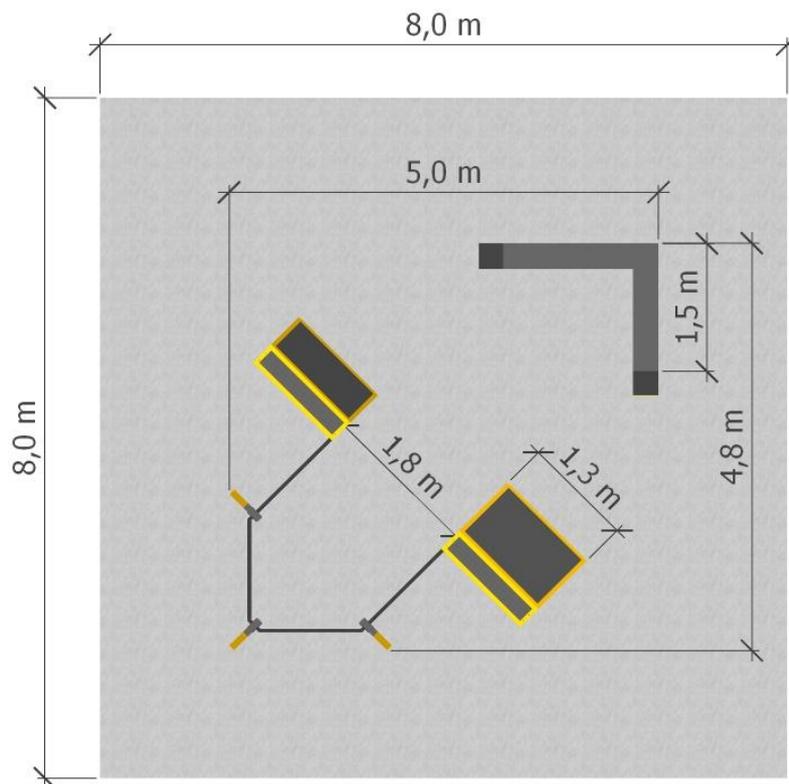

## Side view

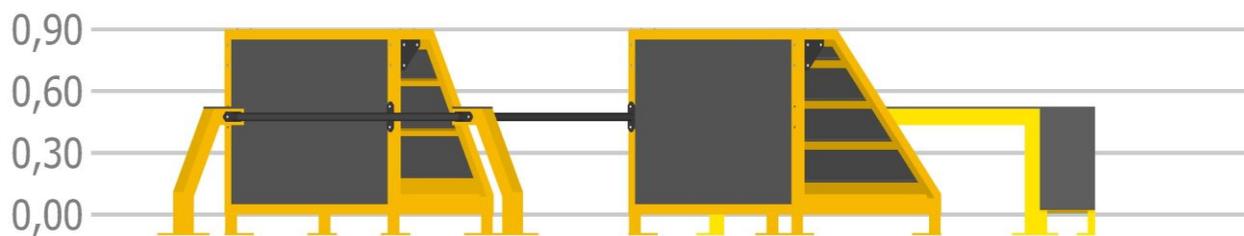

Elements		Technical data	
Rail Ø42,4 mm height <1,6 m	3	Standard:	EN 16899:2017-02
Pole	3	Equipment dimensions:	4,8 x 5,0 x 0,9 m
LW2-H3	1	Safety zone:	8,0 x 8,0 (64 m <sup>2</sup> )
LW3-H3	1	HIC min [m]:	1,0
LS3-H2	2	HIC max [m]:	1,0
		Equipment weight [kg]:	360
		Number of users:	4
		Anti-corrosion coating:	Powder coating
		Colors:	RAL 1037 - yellow RAL 9011 – black (rails, bars)
		Fixing to foundation:	M12 x 145 – ring anchors
		Poles – material:	steel square section 80x80x3 mm
		Rails, bars - material:	steel pipe Ø42,4 wall >5 mm
		Walls - material:	HPL 10 mm anti-slip HEX layer
		Platforms – material:	HPL 10 mm anti-slip HEX layer
		Minimum age of user:	8 years
		Maximum weight of user:	120 kg